


Structure function


1 Type of charging security cable






3 Installation way with desktop

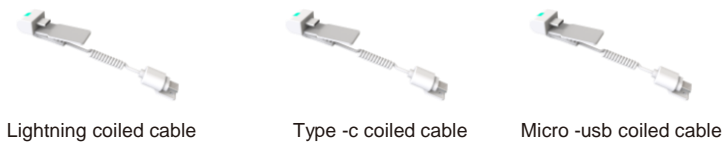


2 Components

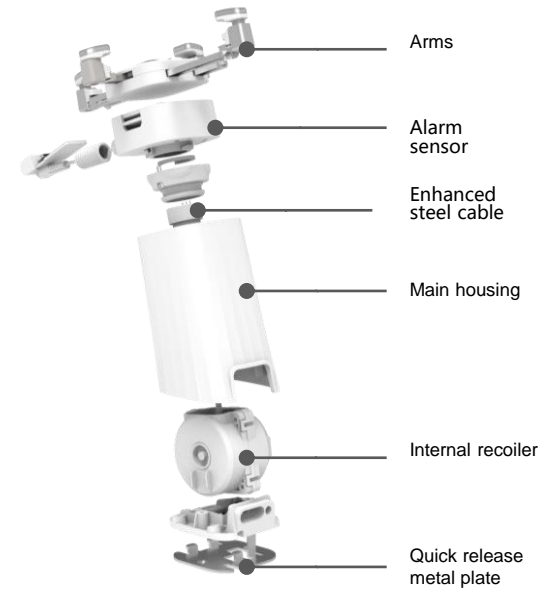

Product dimension

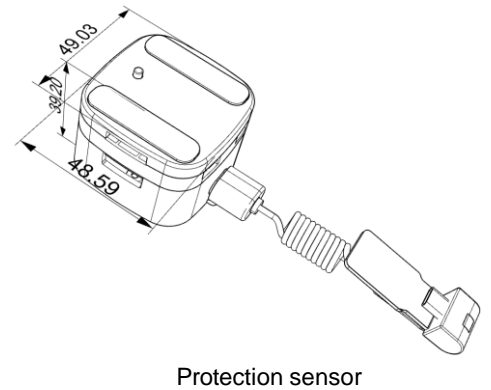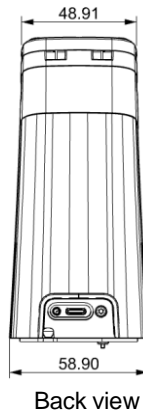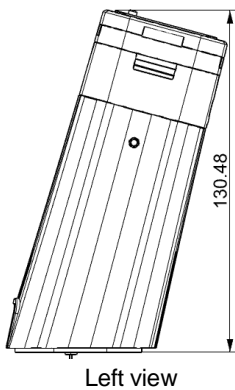

Clamp protection range

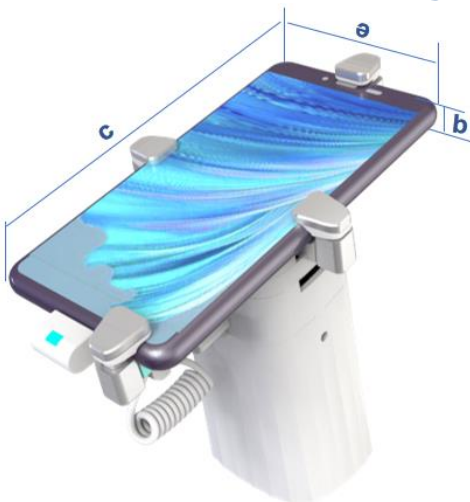

The width and thickness range of clamp protection

Unit(mm)	Code	Width a	Thickness b	
Two-way protection Range	DE30MA-1	$57 \leq a \leq 90$	$6 \leq b \leq 11$	
	DE30MA-2	$140 \leq a \leq 245$	$6 \leq b \leq 11$	
Four-way protection Range	Code	Width a	Length c	Thickness b
	PJ040	$57 \leq a \leq 90$	$110 \leq c \leq 190$	$6 \leq b \leq 11$
	PJ041	$110 \leq a \leq 190$	$140 \leq c \leq 245$	$6 \leq b \leq 11$